




**THE COLONIAL LEVER LOCK**


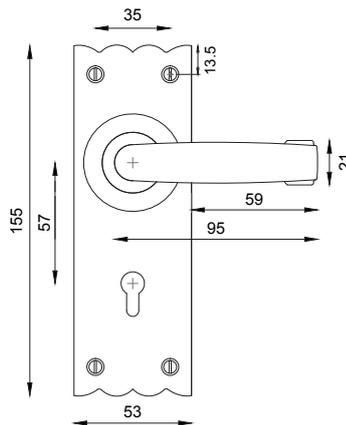


1  
INSIDE / OUTSIDE VIEW

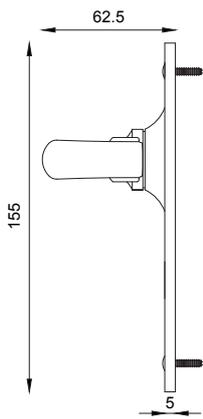

This lock handle is suitable for use with most U.K. lever sashlocks with a 57mm CTC.

For a new interior door installation we would recommend for use with our York 3 lever sashlock with black finished strikes ref: YKSL323 (2.5") or YKSL333 (3") or for a new exterior door our York 5 lever British Standard sashlock ref: YK BSSL29 (2.5") or YK BSSL39 (3")

- 2
- 
- Spindle : 7.8mm x 80mm - 1pc.
- 
- Spindle : 7.8mm x 90mm - 1pc.

- 3
- 
- No. 6 x 25mm Steel starter screw x 1pc.  
Drill pilot holes, use the starter screw to cut a thread

- 4
- 
- No. 6 x 19mm Black-Nickel Plated Stainless Steel (SS) wood screw x 8pcs.  
Fasten the SS screw into the pilot hole

Box Contains	1	2	3	4
	1 x Lever Handle Pair	1x 80mm spindle for 35mm door 1x 90mm spindle for 45mm door	1x Steel pilot wood screw	8x SS wood screws

  
**M Marcus Ltd., Dudley**

Material	Date	Product Code	Description	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
Malleable Iron	23 July 2016	TC300	The Colonial Lever Lock	