



C1820 FLUSH PULL

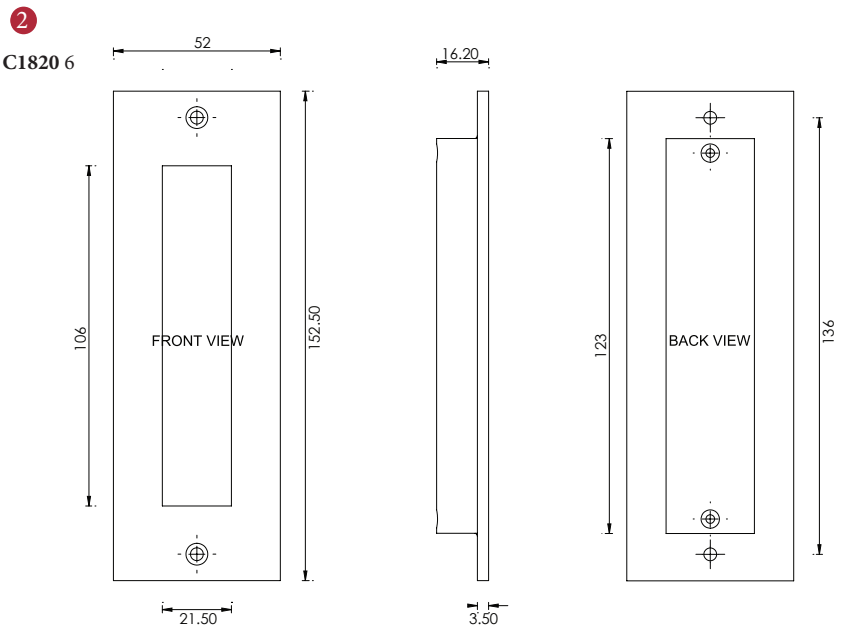

The recess measurement required to fit this item is taken from the back

**2** For dimensions of the two product sizes:  
 • C1820 4  
 • C1820 6  
 see the outlines given above

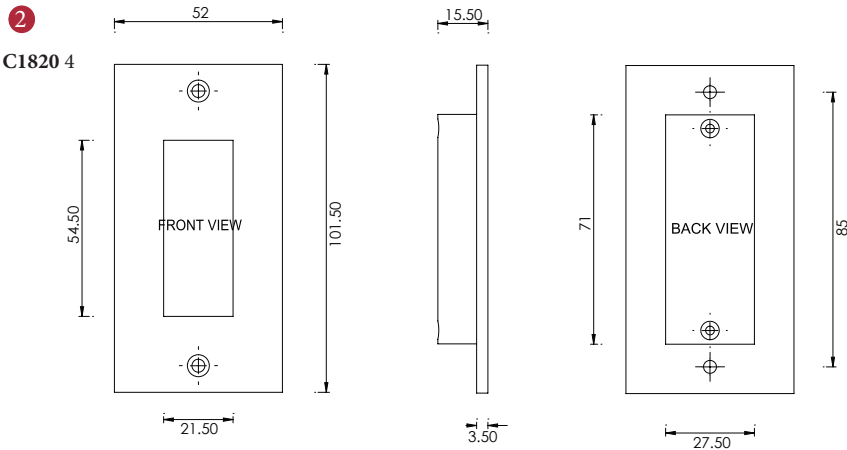

**FITTING**

- 1 Position flush pull centrally to determine where to drill screw holes and where to remove required recess for flush pull.
- 2 Remove just sufficient timber to create a recess for the back of the flush pull and which allows the plate to lie flat onto the surface of the door.
- 3 The door may dictate where the pull can be fitted, as general guide for fitting, the centre of the pull should be positioned approx. 1000mm from the floor, and this should be a suitable height for most people.

<b>Overview</b>	<b>1</b> Flush Pull illustrated	<b>2</b> General Dimensions of Flush Pull(s)	<b>3</b> Supplied with: 2x 26mm screw 1x starter screw
-----------------	---------------------------------	--	--

  
**M Marcus Ltd., Dudley**

Product Code	Material	Available in all Heritage Brass finishes.	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
C1820	Solid Brass		